



ART.7991 sim. ISO 10642 ex UNI 5933 DIN 7991

Vite a testa svasata piana con cava esagonale

Hexagon socket countersunk head screw

disponibile in A2 / A4  
available in A2 / A4

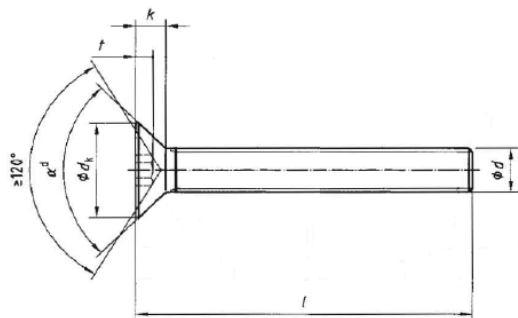

d	M3	M4	M5	M6	M8	M10	M12	(M14)	M16	M20
dk max.	6,72	8,96	11,2	13,44	17,92	22,4	26,88	30,8	33,6	40,32
e min.	2,303	2,873	3,443	4,583	5,723	6,863	9,149	11,429	11,429	13,716
k max.	1,86	2,48	3,1	3,72	4,96	6,2	7,44	8,4	8,8	10,16
s nom.	2	2,5	3	4	5	6	8	10	10	12
t min.	1,1	1,5	1,9	2,2	3	3,6	4,3	4,5	4,8	5,6

La dimensioni tra parentesi sono sconsigliate  
The size in brackets should be avoided if possible

last edit 22/07/2019 Pag. 1/3

DRAWING N. 1069

0115078