

DIN 965 H sim. UNI 7688 EN ISO 7046



Vite a testa svasata piana con impronta a croce H (Phillips)

Cross recessed H (Phillips) countersunk head screw

Disponibile/Available :

 A2

 A4

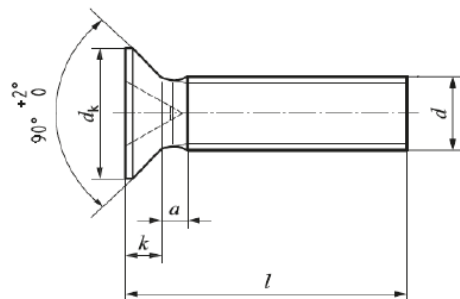

d	M1,6	M2	M2,5	M3	M4	M5	M6	M8	M10
p*	0,35	0,4	0,45	0,5	0,7	0,8	1,0	1,25	1,5
a	max. 0,7	0,8	0,9	1	1,4	1,6	2	2,5	3
dk	nom. = max. 3	3,8	4,7	5,6	7,5	9,2	11	14,5	18
	min. 2,75	3,5	4,4	5,3	7,14	8,84	10,57	14,07	17,57
k	max. 0,96	1,2	1,5	1,65	2,2	2,5	3	4	5
Cross recess	Recess no.	0	1			2		3	4
	m ref.	1,7	2,35	2,7	2,9	4,4	4,6	6,6	8,7
	Type H max.	0,91	1,25	1,55	1,8	2,4	2,77	2,6	3,3
	penetration min.	0,66	0,95	1,25	1,5	1,9	3,27	2,1	2,8
4,8									

* P è il passo del filetto

* P is the pitch of the thread.

last edit 24/07/2019 pag. 1/2

DRAWING N. 1093