

2251

2251

FUNZIONAMENTO

Rotazione 90°Ds+90°Sn (1 uscita ch.)

Rotazione 90°Ds (1 uscita chiave)

Rotazione 90°Sn (1 uscita chiave)

CILINDRO Ø M19

"L"	Peso di 1 pz
16	mm 16 g 73,60
20	mm 20 g 79,80
25	mm 25 g 89,20
30	mm 30 g 98,80

CIFRATURE vedi pag 4

KD chiavi differenti

KA chiavi uguali

Gruppi di KA

Chiave maestra

CHIAVE

Art.1824 (2 pz)

FINITURE

Ottone decapato (US4)

Ottone nichelato (US14)

ACCESSORI

1 rondella Art.885 x L=16

1 rondella Art.886 x L=20-25-30

Senza rondella

ACCESSORI COMPLEMENTARI
vedi serie O86**LEVETTE** vedi pag.15

Piana A0 (non applicata)

Senza levette

CONFEZIONI

Commercio 20 pz

Maestra 150 pz

Industria 100 pz

2251

OPERATION

Rotating 90°L+90°R (1 key pull)

Rotating 90°L (1 key pull)

Rotating 90°R (1 key pull)

CYLINDER Ø M19

"L"	Weight of 1's
5/8"	ozs 2,59
25/32"	ozs 2,81
63/64"	ozs 3,14
1 3/16"	ozs 3,48

KEY-CHANGES see page 5

KD keyed differently

KA keyed alike

KA in group

Master key

KEY

Art.1824 (2 pcs)

FINISHES

Pickled brass (US4)

Nickel plated brass (US14)

ACCESSORIES

1 washer Art.885 x L=5/8"

1 washer Art.886 x L=25/31"-63/64"

1 3/16"

Without washer

COMPLEM. ACCESSORIES
see series O86**CAMS** see page 15

Flat A0 (disassembled)

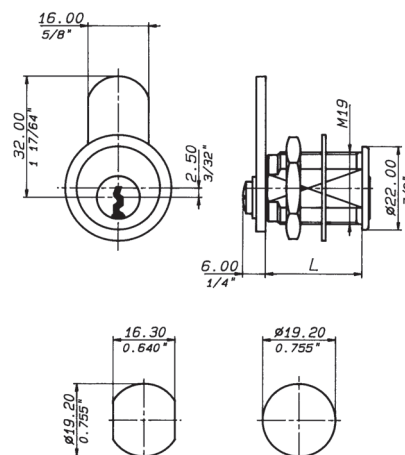
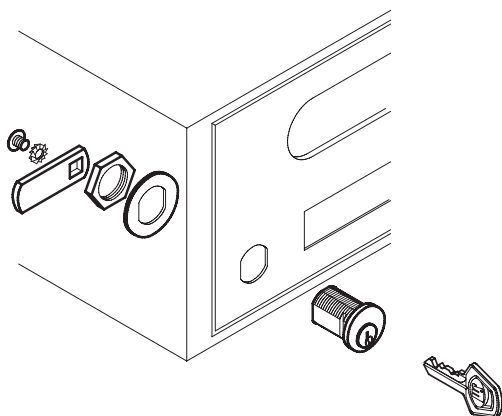
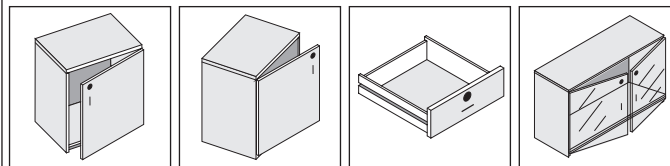
Without cam

PACKAGING

Boxed in 20's

Master key boxed in 150's

Bulk in 100's

Foro per metallo
Hole for metalForo per legno
Hole for wood