



DIN 7985 H sim. UNI 7687H ISO 7045H

Vite a testa cilindrica bombata con impronta croce H (Phillips)

Cross recessed H (Phillips) pan head screw

Disponibile/Available :  A2  A4

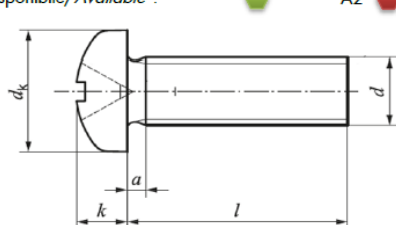

<i>P</i> *	0,35	0,4	0,45	0,5	0,7	0,8	1,0	1,25
<i>a</i> max.	0,7	0,8	0,9	1	1,4	1,6	2	2,5
<i>dk</i>	nom. = max.	3,2	4,0	5,0	6	8,00	10	12,00
	min.	2,9	3,7	4,7	5,7	7,64	9,64	11,57
<i>k</i>	Nominal Size	1,3	1,6	2,00	2,40	3,1	3,8	4,6
	max.	1,42	1,72	2,18	2,52	3,25	3,95	4,75
	min.	1,18	1,48	1,88	2,28	2,95	3,65	4,45
Cross recess	<i>Recess</i> no.	0	1			2		3
	<i>m</i> ref.	1,7	1,9	2,7	3	4,4	4,9	6,9
	Type H max.	0,72	1,1	1,3	1,7	2,04	2,77	3,03
	penetration min.	1,02	1,4	1,6	2	2,54	3,27	3,53
<i>d</i>		M1,6	M2	M2,5	M3	M4	M5	M6

* *P* è il passo del filetto

* *P* is the pitch of the thread.

last edit 24/07/2019 pag. 1/2

DRAWING N. 1087

<i>l/d</i>	M1,6	M2	M2,5	M3	M4	M5	M6	M8
2	/	/						
3	1,6x3	2x3	2,5x3					
4	1,6x4	2x4	2,5x4	3x4	4x4			
5	1,6x5	2x5	2,5x5	3x5	4x5			
6	1,6x6	2x6	2,5x6	3x6	4x6	5x6		
8	1,6x8	2x8	2,5x8	3x8	4x8	5x8	6x8	
10	1,6x10	2x10	2,5x10	3x10	4x10	5x10	6x10	8x10
12	1,6x12	2x12	2,5x12	3x12	4x12	5x12	6x12	8x12
(14)	/	2x14	2,5x14	3x14	4x14	5x14	6x14	/
16	1,6x16	2x16	2,5x16	3x16	4x16	5x16	6x16	8x16
(18)	/	2x18	2,5x18	3x18	4x18	5x18	6x18	/
20	1,6x20	2x20	2,5x20	3x20	4x20	5x20	6x20	8x20
(22)			/	3x22	4x22	5x22	/	/
25			2,5x25	3x25	4x25	5x25	6x25	8x25
(28)			/	/	/	/	/	/
30			2,5x30	3x30	4x30	5x30	6x30	8x30
35				3x35	4x35	5x35	6x35	8x35
40				3x40	4x40	5x40	6x40	8x40
45				3x45	4x45	5x45	6x45	8x50
50				3x50	4x50	5x50	6x50	8x50
55					4x55	5x55	6x55	/
60					4x60	5x60	6x60	8x60
70					4x70	5x70	6x70	8x70
80					4x80	5x80	6x80	8x80
90							6x90	8x90

Le lunghezze tra parentesi sono sconsigliate

Sizes in parentheses should be avoided if possible.

Le lunghezze standard sono quelle tra le due linee in grassetto.

The range of commercial lengths *i* between the bold stepped lines.

last edit 24/07/2019 pag. 2/2

DRAWING N. 1087